




OKUMA

Straight drilling and milling head




Direction of rotation: ↺ ↻

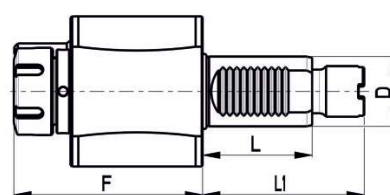

Code	D	Tool grip	IC	F	L	L1	W	W1	Torque [Nm]	Speed [rpm]	Ratio	P [bar]
NGT1-30/151-25/1JA	30	ER25	no	90	55	69	64	68	28	6000	1:1	-
NGT1-30/151-25/2JA	30	ER25	yes	90	55	69	64	68	28	6000	1:1	20
NGT1-40/151-25/1JA	40	ER25	no	106	63	93	80	86	50	6000	1:1	-
NGT1-40/151-25/2JA	40	ER25	yes	106	63	93	80	86	50	6000	1:1	20
NGT1-40/151-32/1JA	40	ER32	no	109	63	93	80	86	50	6000	1:1	-
NGT1-40/151-32/2JA	40	ER32	yes	109	63	93	80	86	50	6000	1:1	20
NGT1-40/151-25/1JB	40	ER25	no	106	63	101	80	86	50	6000	1:1	-
NGT1-40/151-25/2JB	40	ER25	yes	106	63	101	80	86	50	6000	1:1	-
NGT1-40/151-32/1JB	40	ER32	no	109	63	101	80	86	50	6000	1:1	20
NGT1-40/151-32/2JB	40	ER32	yes	109	63	101	80	86	50	6000	1:1	-
NGT1-30/155-25/3EDJA	30	ER25	yes	88,5	55	69	67	67	28	6000	1:1	80
NGT1-30/155-25/3HDJA	30	ER25	yes	88,5	55	69	67	67	28	6000	1:1	80
NGT1-40/155-25/3EDJA	40	ER25	yes	93,5	63	93	79	79	50	6000	1:1	80
NGT1-40/155-25/3HDJA	40	ER25	yes	93,5	63	93	79	79	50	6000	1:1	80
NGT1-40/155-32/3EDJA	40	ER32	yes	93,5	63	93	79	79	50	6000	1:1	80
NGT1-40/155-32/3HDJA	40	ER32	yes	93,5	63	93	79	79	50	6000	1:1	80
NGT1-40/155-25/3EDJB	40	ER25	yes	93,5	63	101	79	79	50	6000	1:1	80
NGT1-40/155-25/3HDJB	40	ER25	yes	93,5	63	101	79	79	50	6000	1:1	80
NGT1-40/155-32/3EDJB	40	ER32	yes	93,5	63	101	79	79	50	6000	1:1	80
NGT1-40/155-32/3HDJB	40	ER32	yes	93,5	63	101	79	79	50	6000	1:1	80
NGT1-50/151-32/1JA	50	ER32	no	114	71	106	88	88	80	6000	1:1	-
NGT1-50/151-32/2JA	50	ER32	yes	114	71	106	88	88	80	6000	1:1	20
NGT1-50/151-40/1JA	50	ER40	no	116	71	106	88	88	80	6000	1:1	-
NGT1-50/151-40/2JA	50	ER40	yes	116	71	106	88	88	80	6000	1:1	20

OKUMA TURRET


Angular drilling and milling head

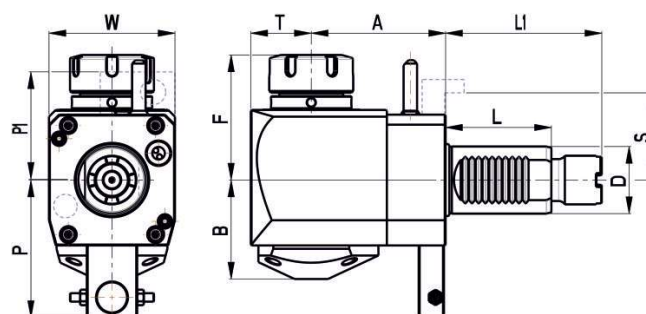
 Direction of rotation: 


Code	D	Tool grip	IC	Direction	A	B	F	L	L1	P	S	T	W	Torque [Nm]	Speed [rpm]	Ratio	P [bar]
NGT1-30/251-25/1.1-85JA	30	ER25	no	right	85	48	65	55	69	P1=57	-	29	64	28	6000	1:1	-
NGT1-30/251-25/2.1-85JA	30	ER25	yes	right	85	51	65	55	69	P1=57	-	29	64	28	6000	1:1	20
NGT1-30/251-25/1.2-55JB	30	ER25	no	left	55	48	65	55	69	72	-	29	64	28	6000	1:1	-
NGT1-30/251-25/2.2-55JB	30	ER25	yes	left	55	51	65	55	69	72	-	29	64	28	6000	1:1	20
NGT1-40/251-25/1.2-80JA	40	ER25	no	left	80	59	72	63	93	82	-	36	75	50	6000	1:1	-
NGT1-40/251-25/2.2-80JA	40	ER25	yes	left	80	62	72	63	93	82	-	36	75	50	6000	1:1	20
NGT1-40/251-32/1.2-80JA	40	ER32	no	left	80	59	75	63	93	82	-	36	75	50	6000	1:1	-
NGT1-40/251-32/2.2-80JA	40	ER32	yes	left	80	62	75	63	93	82	-	36	75	50	6000	1:1	20
NGT1-40/251-25/1.2-80JB	40	ER25	no	left	80	59	72	63	101	82	-	36	75	50	6000	1:1	-
NGT1-40/251-25/2.2-80JB	40	ER25	yes	left	80	62	72	63	101	82	-	36	75	50	6000	1:1	20
NGT1-40/251-32/1.2-80JB	40	ER32	no	left	80	59	75	63	101	82	-	36	75	50	6000	1:1	-
NGT1-40/251-32/2.2-80JB	40	ER32	yes	left	80	62	75	63	101	82	-	36	75	50	6000	1:1	20
NGT1-40/251-25/1.1-80JD	40	ER25	no	right	80	59	72	63	93	-	50	36	75	50	6000	1:1	-
NGT1-30/251-25/3.1-85JA	30	ER25	yes	right	55	61	65	55	69	P1=57	-	29	64	28	6000	1:1	80
NGT1-30/251-25/3.2-55JB	30	ER25	yes	left	85	61	65	55	69	72	-	29	64	28	6000	1:1	80
NGT1-40/251-25/3.1-80JD	40	ER25	yes	right	80	72	72	63	93	-	50	36	75	50	6000	1:1	80
NGT1-40/251-32/3.1-80JD	40	ER32	yes	right	80	72	75	63	93	-	50	36	75	50	6000	1:1	80
NGT1-40/251-25/3.2-80JA	40	ER25	yes	left	80	72	72	63	93	82	-	36	75	50	6000	1:1	80
NGT1-40/251-32/3.2-80JA	40	ER32	yes	left	80	72	75	63	93	82	-	36	75	50	6000	1:1	80
NGT1-40/251-25/3.2-80JB	40	ER25	yes	left	80	72	72	63	101	82	-	36	75	50	6000	1:1	80
NGT1-40/251-32/3.2-80JB	40	ER32	yes	left	80	72	75	63	101	82	-	36	75	50	6000	1:1	80
NGT1-40/251-32/1.2-80JD	40	ER32	no	left	80	59	75	63	93	-	50	36	75	50	6000	1:1	-
NGT1-40/251-32/2.2-80JD	40	ER32	yes	left	80	62	75	63	93	-	50	36	75	50	6000	1:1	20
NGT1-40/251-32/3.2-80JD	40	ER32	yes	left	80	72	75	63	93	-	50	36	75	50	6000	1:1	80
NGT1-40/251-32/1.1-80JC	40	ER32	no	right	80	59	75	63	93	-	50	36	75	50	6000	1:1	-
NGT1-40/251-32/2.1-80JC	40	ER32	yes	right	80	62	75	63	93	-	50	36	75	50	6000	1:1	20
NGT1-40/251-32/3.1-80JC	40	ER32	yes	right	80	72	75	63	93	-	50	36	75	50	6000	1:1	80
NGT1-40/251-32/1.1-80JE	40	ER32	no	right	80	59	75	63	101	-	50	36	75	50	6000	1:1	-
NGT1-40/251-32/2.1-80JE	40	ER32	yes	right	80	62	75	63	101	-	50	36	75	50	6000	1:1	20
NGT1-40/251-32/3.1-80JE	40	ER32	yes	right	80	72	75	63	101	-	50	36	75	50	6000	1:1	80
NGT1-50/251-32/1.2-110JA	50	ER32	no	left	110	64	117	71	106	102	-	42	88	80	6000	1:1	-
NGT1-50/251-32/2.2-110JA	50	ER32	yes	left	110	64	117	71	106	102	-	42	88	80	6000	1:1	20
NGT1-50/251-32/3.2-110JA	50	ER32	yes	left	110	75	117	71	106	102	-	42	88	80	6000	1:1	80
NGT1-50/251-40/1.2-110JA	50	ER40	no	left	110	64	119	71	106	102	-	42	88	80	6000	1:1	-
NGT1-50/251-40/2.2-110JA	50	ER40	yes	left	110	64	119	71	106	102	-	42	88	80	6000	1:1	20
NGT1-50/221-40/3.2-110JA	50	ER40	yes	left	110	75	119	71	106	102	-	42	88	80	6000	1:1	80

OKUMA TURRET


Angular drilling and milling head - SAME DIRECTION

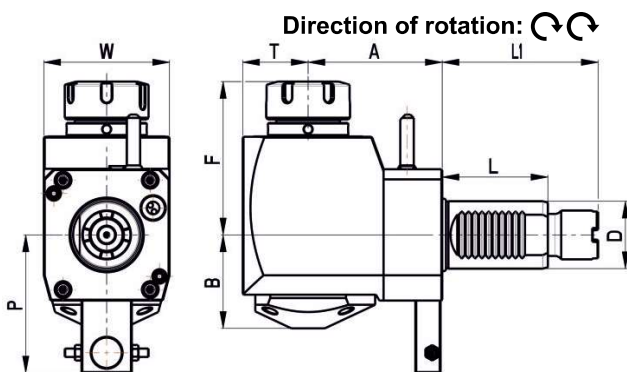

Code	D	Tool grip	IC	Direction	A	B	F	L	L1	P	T	W	Torque [Nm]	Speed [rpm]	Ratio	P [bar]
NGT1-40/251-32/1.2-80JAS	40	ER32	no	left	80	59	91	63	93	82	36	75	50	6000	1:1	-
NGT1-40/251-32/2.2-80JAS	40	ER32	yes	left	80	62	91	63	93	82	36	75	50	6000	1:1	20
NGT1-40/251-32/3.2-80JAS	40	ER32	yes	left	80	72	91	63	93	82	36	75	50	6000	1:1	80
NGT1-40/251-32/1.2-67JAS	40	ER32	no	left	67	59	91	63	93	82	36	75	50	6000	1:1	-
NGT1-40/251-32/2.2-67JAS	40	ER32	yes	left	67	62	91	63	93	82	36	75	50	6000	1:1	20
NGT1-40/251-32/3.2-67JAS	40	ER32	yes	left	67	72	91	63	93	82	36	75	50	6000	1:1	80
NGT1-40/251-32/1.2-80JBS	40	ER32	no	left	80	59	91	63	101	82	36	75	50	6000	1:1	-
NGT1-40/251-32/2.2-80JBS	40	ER32	yes	left	80	62	91	63	101	82	36	75	50	6000	1:1	20
NGT1-40/251-32/3.2-80JBS	40	ER32	yes	left	80	72	91	63	101	82	36	75	50	6000	1:1	80

Offset angular drilling and milling head

Direction of rotation: ↺ ↻

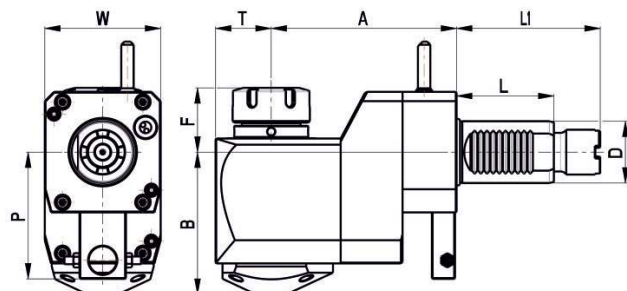


Code	D	Tool grip	IC	Direction	A	B	F	L	L1	P	T	W	Torque [Nm]	Speed [rpm]	Ratio	P [bar]
NGT1-30/451-25/1.2-75JB	30	ER25	no	left	75	71	42	55	69	72	29	64	28	6000	1:1	-
NGT1-30/451-25/2.2-75JB	30	ER25	yes	left	75	74	42	55	69	72	29	64	28	6000	1:1	20
NGT1-40/451-25/1.2-120JA	40	ER25	no	left	120	92	39	63	93	82	36	75	50	6000	1:1	-
NGT1-40/451-25/2.2-120JA	40	ER25	yes	left	120	95	39	63	93	82	36	75	50	6000	1:1	20
NGT1-40/451-32/1.2-120JA	40	ER32	no	left	120	92	41	63	93	82	36	75	50	6000	1:1	-
NGT1-40/451-32/2.2-120JA	40	ER32	yes	left	120	95	41	63	93	82	36	75	50	6000	1:1	20
NGT1-40/451-25/1.2-120JB	40	ER25	no	left	120	92	39	63	101	82	36	75	50	6000	1:1	-
NGT1-40/451-25/2.2-120JB	40	ER25	yes	left	120	95	39	63	101	82	36	75	50	6000	1:1	20
NGT1-40/451-32/1.2-120JB	40	ER32	no	left	120	92	41	63	101	82	36	75	50	6000	1:1	-
NGT1-40/451-32/2.2-120JB	40	ER32	yes	left	120	95	41	63	101	82	36	75	50	6000	1:1	20
NGT1-30/451-25/3.2-75JB	30	ER25	yes	left	75	84	42	55	69	72	29	64	28	6000	1:1	80
NGT1-40/451-25/3.2-120JA	40	ER25	yes	left	120	105	39	63	93	82	36	75	50	6000	1:1	80
NGT1-40/451-32/3.2-120JA	40	ER32	yes	left	120	105	42	63	93	82	36	75	50	6000	1:1	80
NGT1-40/451-25/3.2-120JB	40	ER25	yes	left	120	105	39	63	101	82	36	75	50	6000	1:1	80
NGT1-40/451-32/3.2-120JB	40	ER32	yes	left	120	105	42	63	101	82	36	75	50	6000	1:1	80

OKUMA TURRET

Variable angular drilling and milling head



Direction of rotation: 

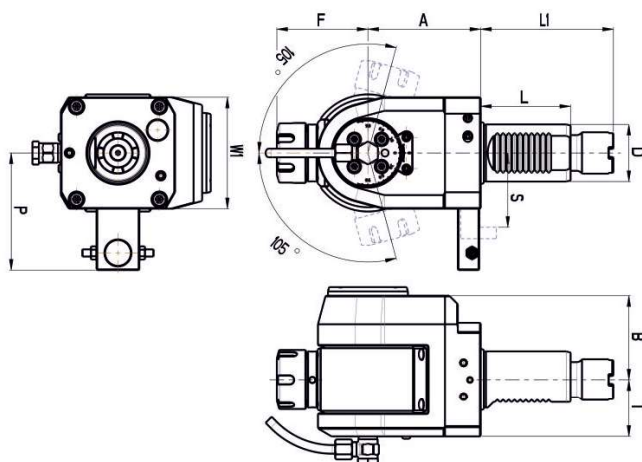

Code	D	Tool grip	IC	Direction	A	B	F	L	L1	P	S	T	W	Torque [Nm]	Speed [rpm]	Ratio	P [bar]
NGT1-30/555-16.1JA	30	ER16	no	right	79	59	45	55	69	57	-	40	64	16	6000	1:1	-
NGT1-30/555-16.2JA	30	ER16	yes	right	86	59	45	55	69	57	-	40	64	16	6000	1:1	20
NGT1-40/551-25.1JA	40	ER25	no	left	79	59	65	63	93	82	-	40	78	16	6000	1:1	-
NGT1-40/551-25.2JA	40	ER25	yes	left	86	59	65	63	93	82	-	40	78	16	6000	1:1	20
NGT1-40/551-25.1JB	40	ER25	no	left	76	59	65	63	101	82	-	40	78	16	6000	1:1	-
NGT1-40/551-25.2JB	40	ER25	yes	left	86	59	65	63	101	82	-	40	78	16	6000	1:1	20
NGT1-30/555-16.1.2JB	30	ER16	no	left	79	59	45	55	69	72	-	40	64	16	6000	1:1	-
NGT1-30/555-16.2.2JB	30	ER16	yes	left	86	59	45	55	69	72	-	40	64	16	6000	1:1	20
NGT1-40/551-25.1JD	40	ER25	no	right	79	59	65	63	93	-	50	40	78	16	6000	1:1	-
NGT1-40/551-25.2JD	40	ER25	yes	right	86	59	65	63	93	-	50	40	78	16	6000	1:1	20
NGT1-40/551-25.1.2JD	40	ER25	no	left	79	59	65	63	93	-	50	40	78	16	6000	1:1	-
NGT1-40/551-25.2.2JD	40	ER25	yes	left	86	59	65	63	93	-	50	40	78	16	6000	1:1	20
NGT1-50/551-25.1JA	50	ER25	no	left	79	59	65	71	106	102	-	44	94	16	6000	1:1	-
NGT1-50/551-25.2JA	50	ER25	yes	left	86	59	65	71	106	102	-	44	94	16	6000	1:1	20