

LIVE AND STATIC TOOLHOLDERS

BMT65

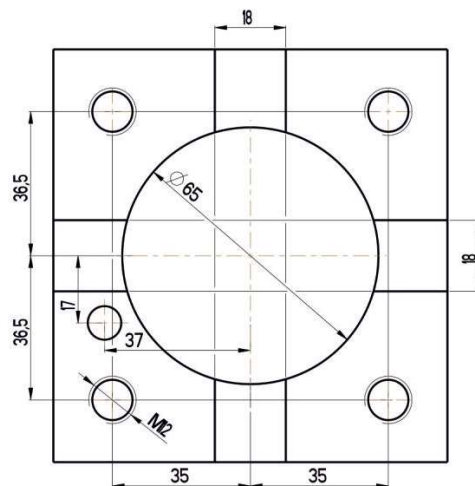
ACCUWAY	UT-300 M/SM (BMT)
	UT-300 Y (BMT)
	UZ-2000 T2Y (BMT)
CHEVALIER	FBL-300
DMC	DL 35-40 M
DOOSAN	INVERTRN 3000 M
	PUMA 2100/2600 M/LM/MS/LMS
	PUMA 2100/2600 Y/LY/SY/LSY
	PUMA 300 M/MS/MB/MC
	PUMA 3100 M/LM/LY/XLM/XLY/ULM/ULY
	PUMA GT 3100 M/LM
	PUMA MX 2000/2500
	PUMA MX 2600 T/ST
	PUMA TT 2000/2500 M/S/Y
	PUMA V400 M
	PUMA VT450 M/M-2SP
	SMX 2660ST
	MT-3 MC/MCSY
	MT-4 MC/MCSY
ECOCA	
FOCUS CNC	FBL 300MC
GANESH	ASL-15 MY (BMT65)
	ASL-78/105 TTM (BMT65)
HAAS	DS-30Y BMT65
	DS-30Y BMT65
	ST-20/25/30/35Y BMT65
	ST-20Y BMT65
	ST-25Y BMT65
	ST-30Y BMT65
	ST-35Y BMT65
HADINGE	Elite 65 M Ultra
HEADMAN	Hi6000M
	T65 M/MS
HURCO	TMX8 / TMX10 MY/MYS (BMT65)

HWACHEON	Cutex 240 (BMT65)
	HI-TECH 200 MC (BMT65)
	HI-TECH 230 (BMT65)
	HI-TECH 300 (BMT65)
	HI-TECH 350 (BMT65)
	HI-TECH 400 MC (BMT65)
	HI-TECH 450 (BMT65)
	T2 (BMT65)
	VT-450 (BMT65)
	SKT 200/250 TTSY
HYUNDAI WIA	HD 3100 M/LM
	L 2000 Y/LY/SY/LSY
	L 2100 SY
	L 2600 Y/LY/SY
	L 300 MA/MC/LMA/LMC/MSA/LMSA/MS
	L 3000 Y/LY/SY
	L 3000 Y/LY/SY/LSY
	LM 2000/2500 TTM/TTMS/TTSY
	LV 450 RM/LM
	SKT 200/250 TTSY
JOHNFORD	SKT 250/300 MS/LMS
	SL 60, 65 (BMT65)
	LTC 25iMY (BMT65)
	LR30TML7
	GL350 M/Y/S
	NL 2500 M/SY/Y
	NL 3000 BM/BLM
LEADWELL	
LMW	
ROMI	
SMART	

LIVE AND STATIC TOOLHOLDERS BMT65

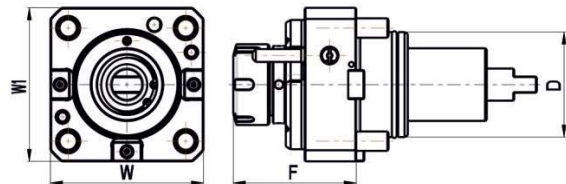
SMEC	PL 20/25/35
	PL 2000/2500
	SL 2000/2500/3500
	SL 25/35
	SL 3500M/Y
	SLV 500M
SPINNER	TC800
	TC800 MCY
TONGTAI	TCS-1500, 2000, 2500
	TD-2000, 2500Y 12ST
	TMT 2000
	TNL-120T
VICTOR	Vturn A26 YSCM
	Vturn S26 CM
WELE	HL-200YS
WIA(KIA)	L2100 SY
	L2600 SY
	L300 MA/LMA/MC/LMC
	L300 MSA/LMSA/MS
	LM2500
	SKT 250 M
	SKT 300 M

CONNECTION TURRET - BMT65



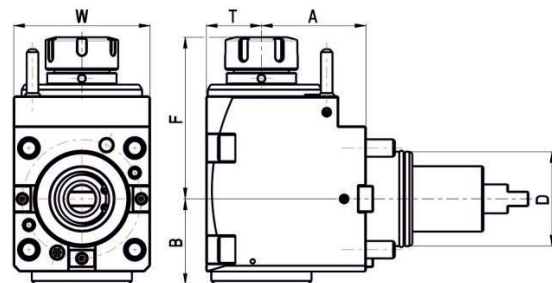
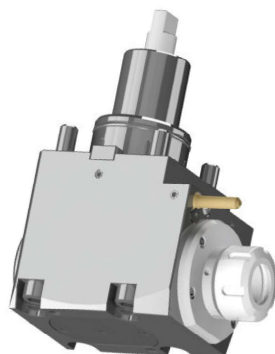
LIVE TOOLHOLDERS BMT65

Straight BMT drilling and milling head

 Direction of rotation: 


Code	D	Tool grip	Internal Cooling	F	W	W1	Torque [Nm]	Speed [rpm]	Ratio	P [bar]
NGT2-65/101-32/1(DO)	65	ER32	no	76	95	95	70	6000	1:1	-
NGT2-65/101-32/2(DO)	65	ER32	yes	76	95	95	70	6000	1:1	20
NGT2-65/101-25/1(DO)	65	ER25	no	73	95	95	70	6000	1:1	-
NGT2-65/101-25/2(DO)	65	ER25	yes	73	95	95	70	6000	1:1	20

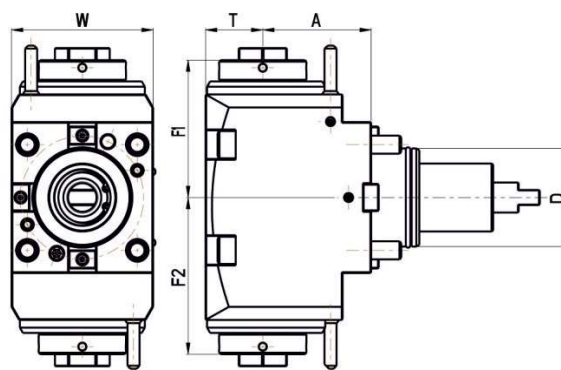
Angular BMT drilling and milling head

 Direction of rotation: 


Code	D	Tool grip	Internal Cooling	Direction	A	B	F	T	W	Torque [Nm]	Speed [rpm]	Ratio	P [bar]
NGT2-65/201-32/1.3-72(DO)	65	ER32	no	right/left	72	59	111	38	94	70	6000	1:1	-
NGT2-65/201-32/2.3-72(DO)	65	ER32	yes	right/left	72	59	111	38	94	70	6000	1:1	20
NGT2-65/201-32/1.3-100(DO)	65	ER32	no	right/left	100	59	111	38	94	70	6000	1:1	-
NGT2-65/201-32/2.3-100(DO)	65	ER32	yes	right/left	100	59	111	38	94	70	6000	1:1	20
NGT2-65/201-25/1.3-72(DO)	65	ER25	no	right/left	72	59	108	38	94	70	6000	1:1	-
NGT2-65/201-25/2.3-72(DO)	65	ER25	yes	right/left	72	59	108	38	94	70	6000	1:1	20
NGT2-65/201-25/1.3-100(DO)	65	ER25	no	right/left	100	59	108	38	94	70	6000	1:1	-
NGT2-65/201-25/2.3-100(DO)	65	ER25	yes	right/left	100	59	108	38	94	70	6000	1:1	20
NGT2-65/201-32/3.3-72(DO)	65	ER32	yes	right/left	72	70	111	38	94	70	6000	1:1	80
NGT2-65/201-32/3.3-100(DO)	65	ER32	yes	right/left	100	70	111	38	94	70	6000	1:1	80
NGT2-65/201-25/3.3-72(DO)	65	ER25	yes	right/left	72	70	108	38	94	70	6000	1:1	80
NGT2-65/201-25/3.3-100(DO)	65	ER25	yes	right/left	100	70	108	38	94	70	6000	1:1	80

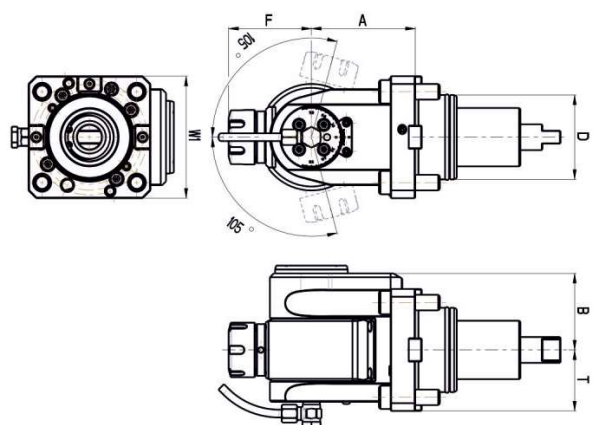
LIVE TOOLHOLDERS BMT65

Double angular BMT drilling and milling head


 Direction of rotation: 


Code	D	Tool grip	Internal Cooling	Direction	A	F1	F2	T	W	Torque [Nm]	Speed [rpm]	Ratio	P [bar]
NGT2-65/205-32D/1.3-72(DO)	65	ER32	no	right/left	72	91	104	38	94	70	6000	1:1	-
NGT2-65/205-32D/2.3-72(DO)	65	ER32	yes	right/left	72	91	104	38	94	70	6000	1:1	20

Variable angle BMT drilling and milling head

 Direction of rotation: 


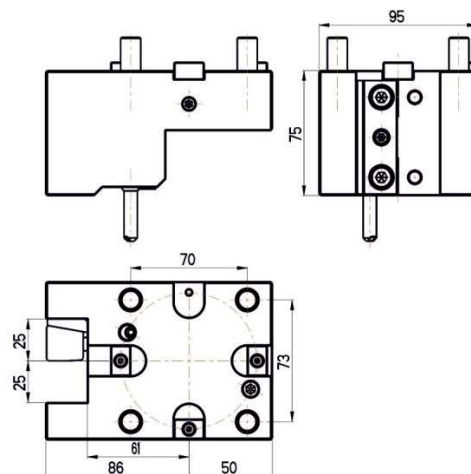

Code	D	Tool grip	Internal Cooling	Direction	A	B	F	T	W1	Torque [Nm]	Speed [rpm]	Ratio	P [bar]
NGT2-65/501-25/1(DO)	65	ER25	no	right/left	80	59	65	47	94	16	6000	1:1	-
NGT2-65/501-25/2(DO)	65	ER25	yes	right/left	80	59	65	47	94	16	6000	1:1	20

STATIC TOOLHOLDERS BMT65

Universal turning holder

NGT OD-65x25x75(DO)

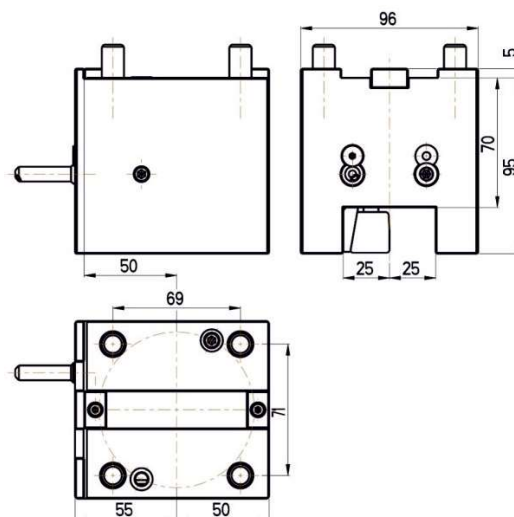

External cooling/**Internal cooling 80bar**



Universal turning face holder

NGT F-65x25x95(DO)

External cooling 80bar



Boring bar holder

NGT ID-65x32x72(DO)

NGT ID-65x40x72(DO)

NGT ID-65x40x100(DO)

External/Internal cooling 80bar

