


NAKAMURA-TOME LIVE AND STATIC TOOLHOLDERS BMT44

MURATEC	MT 100 15ST
NAKAMURA-TOME	NTJ100
	NTY3
	SC-100
	Super NTMX/NTMXL
	Super NTY3
	WT-100
	WY-100
	WY-100


CONNECTION TURRET - NAKAMURA-TOME BMT44

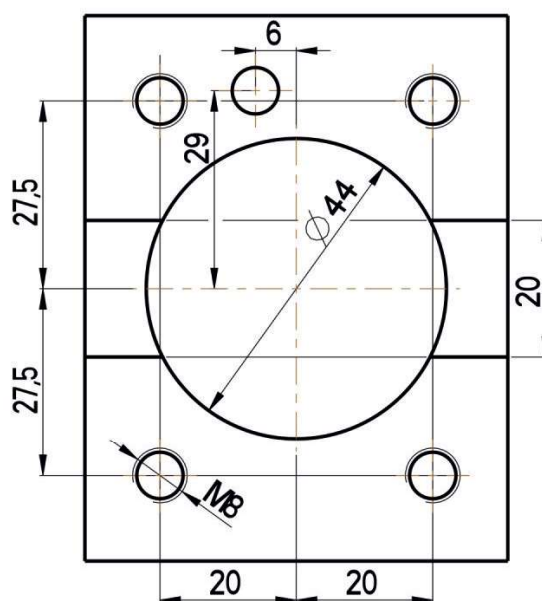

NAKAMURA-TOME LIVE AND STATIC TOOLHOLDERS BMT44

Straight BMT drilling and milling head



Direction of rotation: 

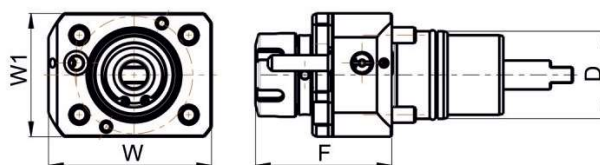

Code	D	Tool grip	Internal Cooling	F	W	W1	Torque [Nm]	Speed [rpm]	Ratio	P [bar]
NGT2-44/101-25/1(NT)	44	ER25	no	70	82	62	40	6000	1:1	-
NGT2-44/101-25/2(NT)	44	ER25	yes	70	82	62	40	6000	1:1	20

Angular BMT drilling and milling head

Direction of rotation: 

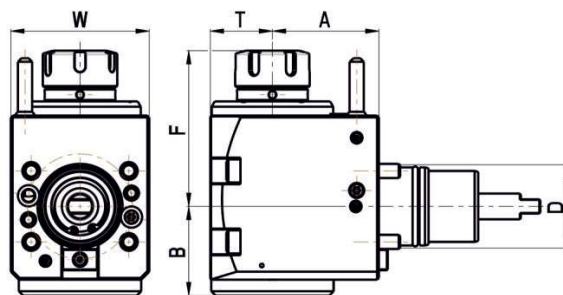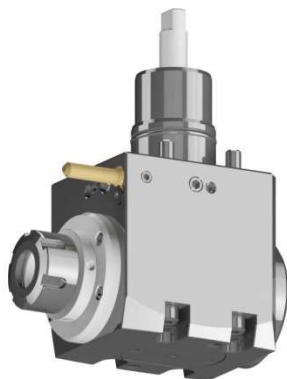



Code	D	Tool grip	Internal Cooling	Direction	A	B	F	T	W	Torque [Nm]	Speed [rpm]	Ratio	P [bar]
NGT2-44/201-25/1.3-60(NT)	44	ER25	no	right/left	60	50	89	35	78	28	6000	1:1	-
NGT2-44/201-25/2.3-60(NT)	44	ER25	yes	right/left	60	50	89	35	78	28	6000	1:1	20
NGT2-44/201-25/3.3-60(NT)	44	ER25	yes	right/left	60	61	89	35	78	28	6000	1:1	80
NGT2-44/201-25/1.3-75(NT)	44	ER25	no	right/left	75	50	89	35	78	28	6000	1:1	-
NGT2-44/201-25/2.3-75(NT)	44	ER25	yes	right/left	76	50	89	35	78	28	6000	1:1	20
NGT2-44/201-25/3.3-75(NT)	44	ER25	yes	right/left	75	61	89	35	78	28	6000	1:1	80

NAKAMURA-TOME LIVE AND STATIC TOOLHOLDERS BMT44

Universal turning holder

NGT OD-44x20x62(NT)



External/Internal cooling 80bar

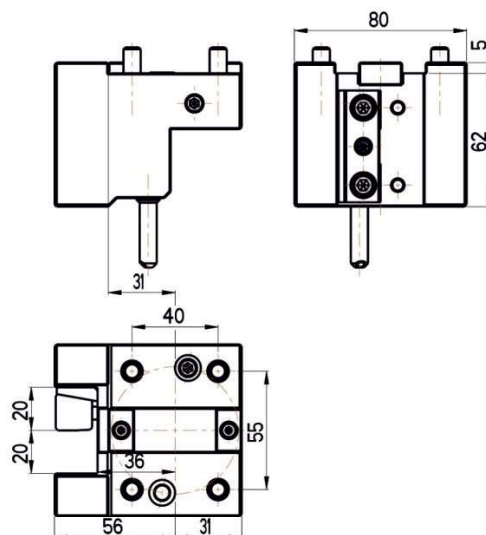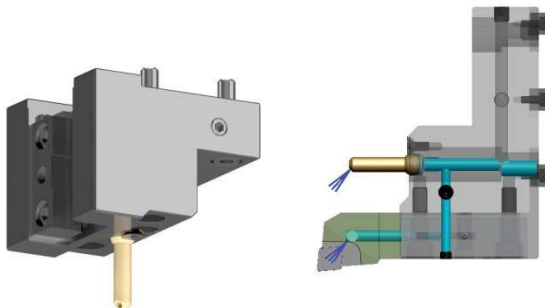

Universal turning face holder

NGT F-44x20x60(NT)



External cooling 80bar

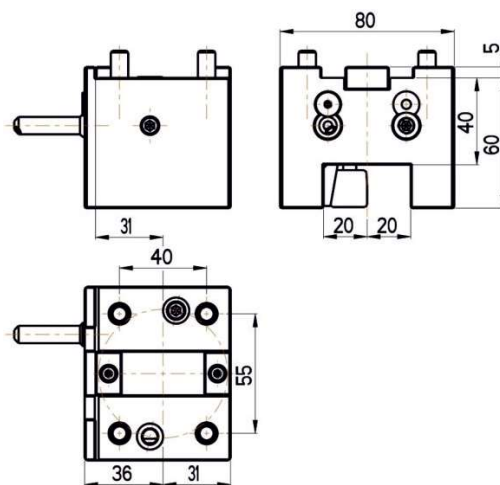

Boring bar holder

NGT ID-44x25x60(NT)


External/Internal cooling 80bar

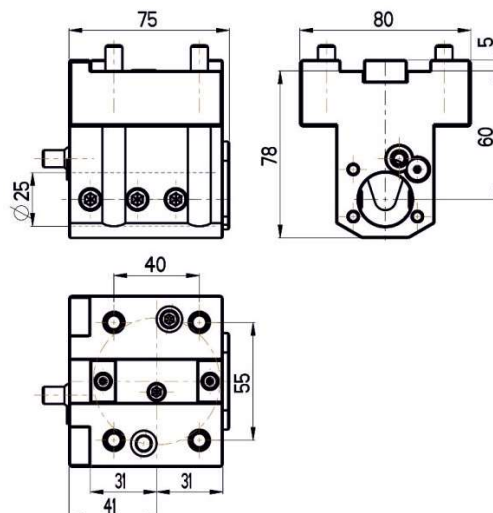

NAKAMURA-TOME LIVE AND STATIC TOOLHOLDERS BMT44

Cut off toolholder (right)

NGT CR-44x26(NT)
External cooling

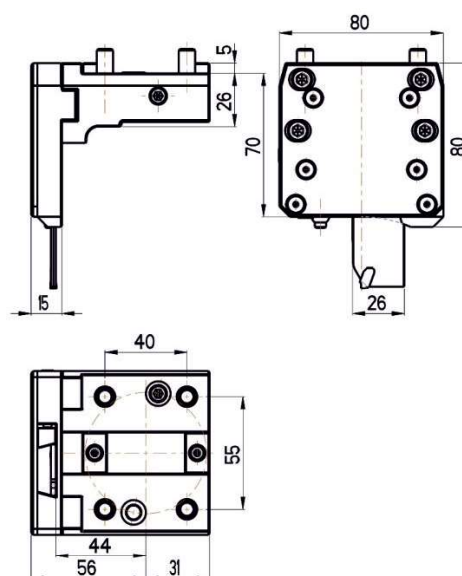

Cut off toolholder (left)

NGT CL-44x26(NT)
External cooling

