


NAKAMURA-TOME LIVE AND STATIC TOOLHOLDERS BMT55

CMZ	TA 15-30, TD 15-55 M/MS/Y/YS (15 ST)
	TA Z400, 640, 1100 (15 ST)
	TTL 52/66
	TX 52/66
EUROTECH	TA 15-30, TD 15-55 M/MS/Y/YS (15 ST)
	TTL 52/66
MURATEC	MT 100B
NAKAMURA-TOME	AS-200
	NTJ
	NTM3
	SC-150 M
	SC-200 M
	SC-250 M
	SUPER NTJ
	TW-10
	TW-20 (16 ST)
	WT-150
	WT-20-II M/MY
	WT-250
	WTS-150
	WTW-150
	WY-250



CONNECTION TURRET - NAKAMURA-TOME BMT 55

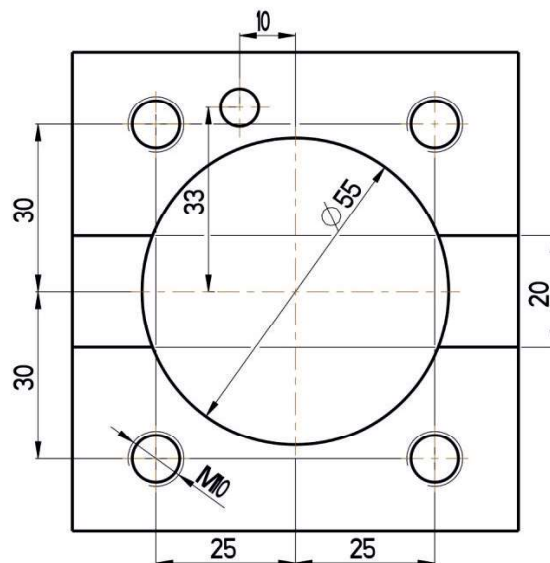

NAKAMURA-TOME LIVE AND STATIC TOOLHOLDERS BMT55

Straight BMT drilling and milling head



Direction of rotation: 

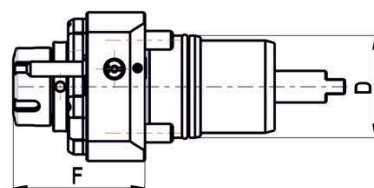

Code	D	Tool grip	Internal Cooling	F	W	W1	Torque [Nm]	Speed	Ratio	P [bar]
NGT2-55/101-25/1(NT)	55	ER25	no	71	89.5	80	50	6000	1:1	-
NGT2-55/101-25/2(NT)	55	ER25	yes	71	89.5	80	50	6000	1:1	20
NGT2-55/101-32/1(NT)	55	ER32	no	74	89,5	80	50	6000	1:1	-
NGT2-55/101-32/2(NT)	55	ER32	yes	74	89,5	80	50	6000	1:1	20

Angular BMT drilling and milling head

Direction of rotation: 

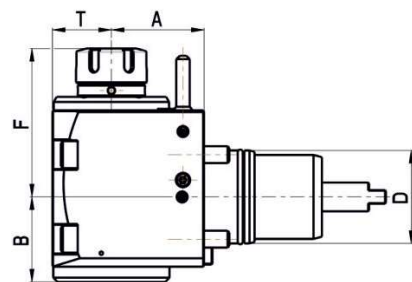

Code	D	Tool grip	Internal Cooling	Direction	A	B	F	T	W	Torque [Nm]	Speed [rpm]	Ratio	P [bar]
NGT2-55/201-25/1.3-55(NT)	55	ER25	no	right/left	55	50.3	89	35	84	28	6000	1:1	-
NGT2-55/201-25/2.3-55(NT)	55	ER25	yes	right/left	55	50.3	89	35	84	28	6000	1:1	20
NGT2-55/201-25/3.3-55(NT)	55	ER25	yes	right/left	55	61	89	35	84	28	6000	1:1	20


NAKAMURA-TOME LIVE AND STATIC TOOLHOLDERS BMT55

Boring bar holder

NGT ID-55x32x55(NT)

NGT ID-55x25x55(NT)



External/Internal cooling 80bar

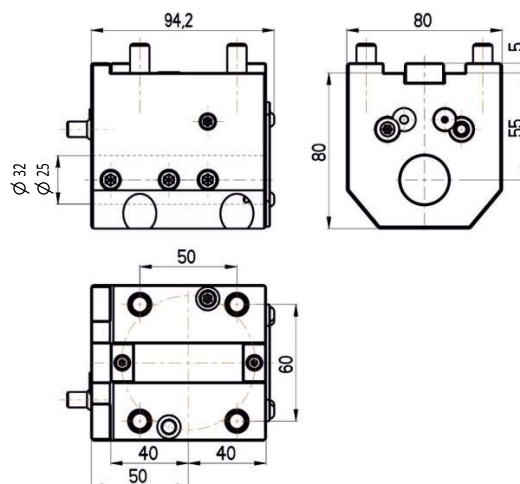

Extended boring bar holder

NGT ID-55x32x55(NT)



External cooling 80bar

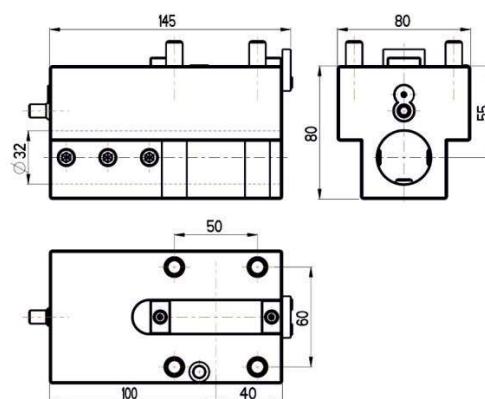

Universal turning holder

NGT OD-55x20x65(NT)



External/Internal cooling 80bar

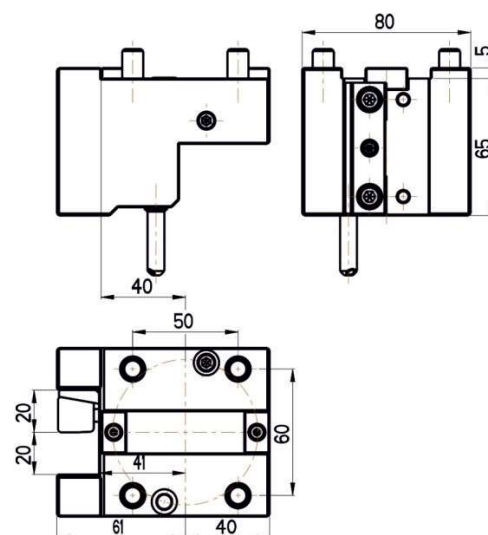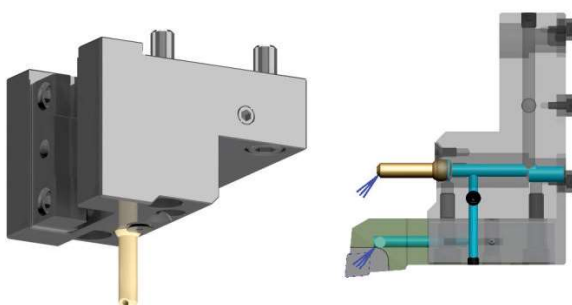

NAKAMURA-TOME LIVE AND STATIC TOOLHOLDERS BMT55


Universal turning face holder

NGT F-55x20x60(NT)
External cooling 80bar

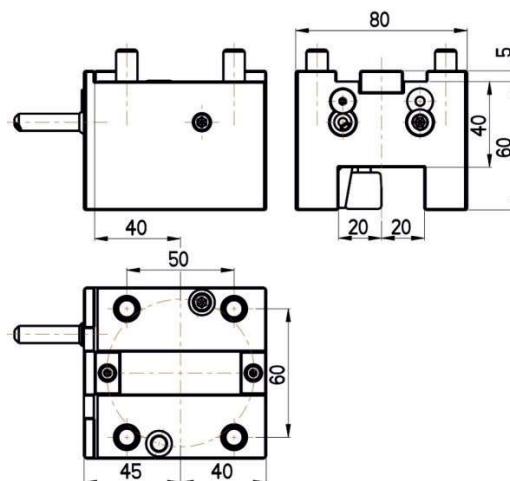

Cut off toolholder (right)

NGT CR-55x32(NT)
External cooling

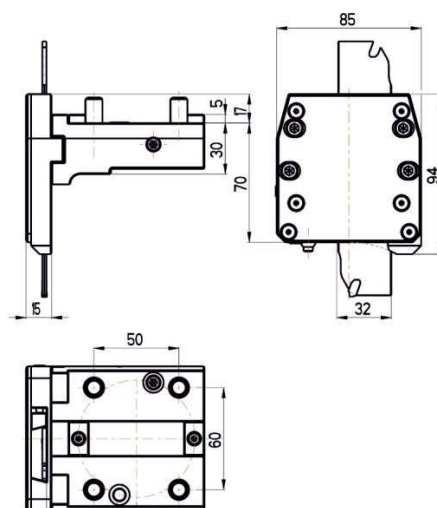

Cut off toolholder (left)

NGT CL-55x32(NT)
External cooling

