


MORI SEIKI LIVE AND STATIC TOOLHOLDERS BMT60



FOCUS CNC	FNL/FBL-250Y/SY (12ST , BMT60)
MORI SEIKI	NL-1500
	NL-2000
	NL-2500
	NL-3000
	NLX-1500
	NLX-2000
	NLX-2500
	NLX-3000
	NLX-4000
	NT-3250 DCG / HSC
	NT-4200
	NT-4250
	NT-4300
	NT-5400
	NZL-2500
	NZX-2500
MTRENT	MTCUT T25/32 Y/SY
TAKISAWA	TS3000 Y/YS 12ST
	TS4000 Y/YS 12ST
	TS5000 Y/YS 12ST

CONNECTION TURRET - MORI SEIKI BMT60

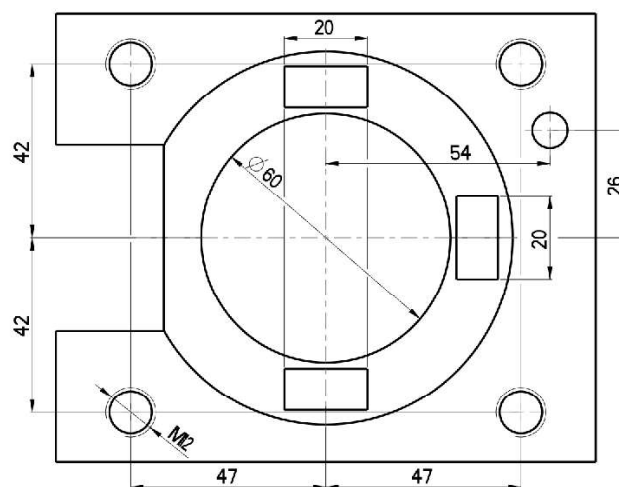

MORI SEIKI LIVE TOOLHOLDERS BMT60




Straight BMT drilling and milling head



Direction of rotation: ↺↻

Code	D	Tool grip	Internal Cooling	F	W	W1	Torque [Nm]	Speed [rpm]	Ratio	P [bar]
NGT2-60/101-32/1(MS)	60	ER32	no	93	108	130	70	6000	1:1	-
NGT2-60/101-32/2(MS)	60	ER32	yes	93	108	130	70	6000	1:1	20
NGT2-60/101-32/1-12K(MS)	60	ER32	no	93	108	130	70	12000	1:1	-



Angular BMT drilling and milling head

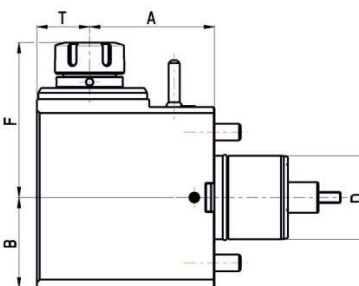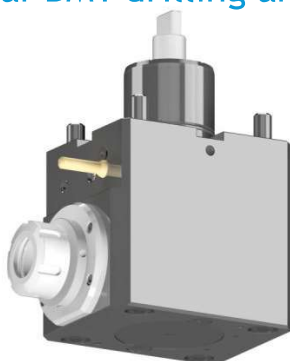

Direction of rotation: ↺↻

Code	D	Tool grip	Internal Cooling	Direction	A	B	F	T	W	Torque [Nm]	Speed [rpm]	Ratio	P [bar]
NGT2-60/201-32/1.3-90(MS)	60	ER32	no	right/left	90	65	111	38	108	70	6000	1:1	-
NGT2-60/201-32/2.3-90(MS)	60	ER32	yes	right/left	90	65	111	38	108	70	6000	1:1	20
NGT2-60/201-32/3.3-90(MS)	60	ER32	yes	right/left	90	70	111	38	108	70	6000	1:1	80

Double angular BMT drilling and milling head

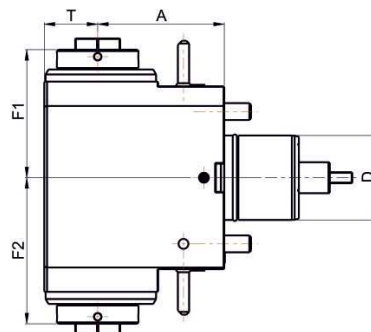

Direction of rotation: ↺↻ / ↻↺


Code	D	Tool grip	Internal Cooling	Direction	A	F1	F2	T	W	Torque [Nm]	Speed [rpm]	Ratio	P [bar]
NGT2-60/205-32D/1.3-90(MS)	60	ER32	no	right/left	90	91	103	38	108	70	6000	1:1	-
NGT2-60/205-32D/2.3-90(MS)	60	ER32	yes	right/left	90	91	103	38	108	70	6000	1:1	20

MORI SEIKI LIVE TOOLHOLDERS BMT60

Universal turning holder

NGT OD-60x25x70(MS)



External/Internal cooling 80bar

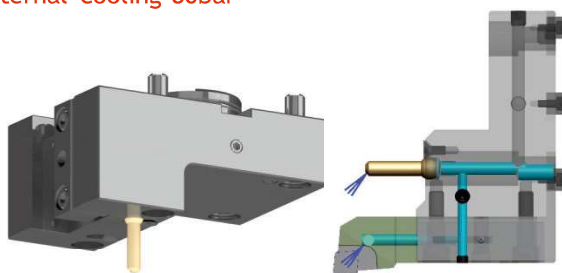

Boring bar holder

NGT ID-60x40x80(MS)

External/Internal cooling 80bar

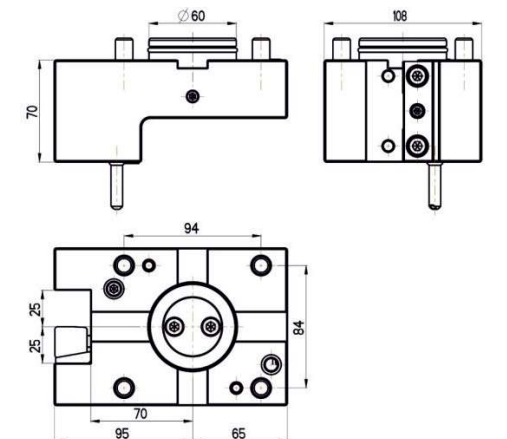

Boring bar holder

NGT ID-60x40x140(MS)

External/Internal cooling 80bar

