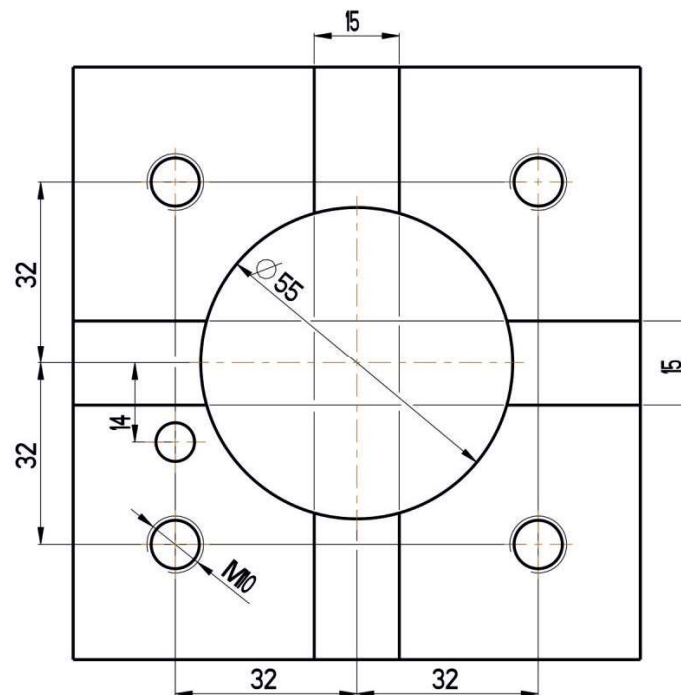


EMAG LIVE AND STATIC TOOLHOLDERS BMT55-83

EMG	VL2 P (BMT55-83)
	VL2 / VLC100 (BMT55-83)
	VL4-V2 (BMT55-83)
	VT2 / VTC100 (BMT55-83)

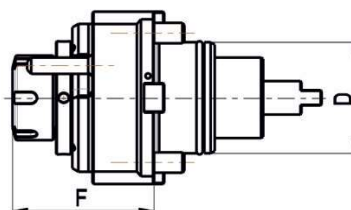

EMCO	Hyperturn 65 (BMT55)
	Maxxturn 65 (BMT55)
	Maxxturn 95 (BMT55)

CONNECTION TURRET - BMT55



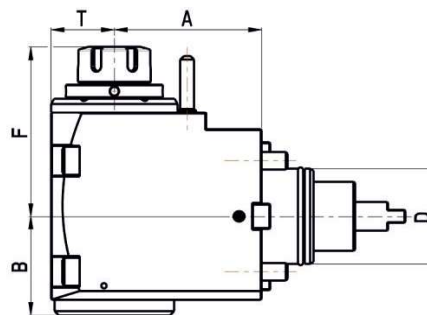

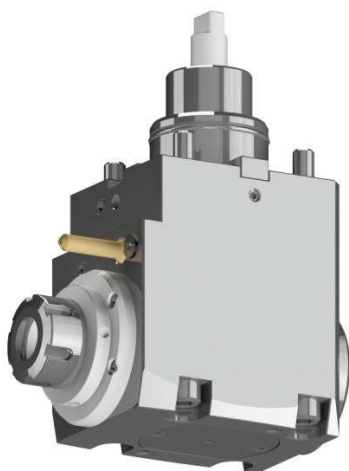
LIVE TOOLHOLDERS BMT55-83

Straight BMT drilling and milling head

Direction of rotation: 


Code	D	Tool grip	Internal Cooling	F	W	W1	Torque [Nm]	Speed [rpm]	Ratio	P [bar]
NGT2-55/101-25/1(EM1)	55	ER25	no	70	87	85	50	6000	1:1	-
NGT2-55/101-25/2(EM1)	55	ER25	yes	70	87	85	50	6000	1:1	20
NGT2-55/101-32/1(EM1)	55	ER32	no	73	87	85	50	6000	1:1	-
NGT2-55/101-32/2(EM1)	55	ER32	yes	73	87	85	50	6000	1:1	20

Angular BMT drilling and milling head

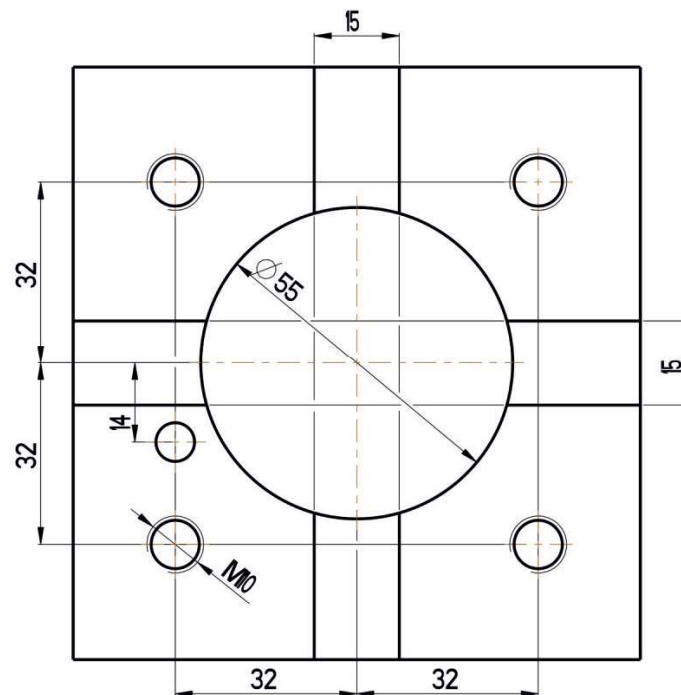
Direction of rotation: 


Code	D	Tool grip	Internal Cooling	Direction	A	B	F	T	W	Torque [Nm]	Speed [rpm]	Ratio	P [bar]
NGT2-55/201-25/1.3-70(EM1)	55	ER25	no	right/left	70	57	98	36,5	85	50	6000	1:1	-
NGT2-55/201-25/2.3-70(EM1)	55	ER25	yes	right/left	70	57	98	36,5	85	50	6000	1:1	20
NGT2-55/201-25/1.3-85(EM1)	55	ER25	no	right/left	85	57	98	36,5	85	50	6000	1:1	-
NGT2-55/201-25/2.3-85(EM1)	55	ER25	yes	right/left	85	57	98	36,5	85	50	6000	1:1	20
NGT2-55/201-32/1.3-85(EM1)	55	ER32	no	right/left	85	57	101	36,5	85	50	6000	1:1	-
NGT2-55/201-32/2.3-85(EM1)	55	ER32	yes	right/left	85	57	101	36,5	85	50	6000	1:1	20
NGT2-55/201-32/1.3-70(EM1)	55	ER32	no	right/left	70	57	101	36,5	85	50	6000	1:1	-
NGT2-55/201-32/2.3-70(EM1)	55	ER32	yes	right/left	70	57	101	36,5	85	50	6000	1:1	20
NGT2-55/201-32/3.3-70(EM1)	55	ER32	yes	right/left	70	68	101	36,5	85	50	6000	1:1	80
NGT2-55/201-25/3.3-70(EM1)	55	ER25	yes	right/left	70	68	98	36,5	85	50	6000	1:1	80
NGT2-55/201-25/3.3-85(EM1)	55	ER25	yes	right/left	85	68	98	36,5	85	50	6000	1:1	80
NGT2-55/201-32/3.3-85(EM1)	55	ER32	yes	right/left	85	68	101	36,5	85	50	6000	1:1	80

EMAG LIVE AND STATIC TOOLHOLDERS BMT55-100

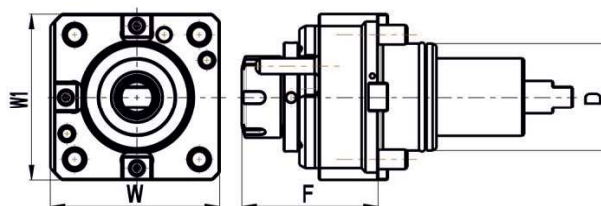
EMG	VL4-V3 (BMT55-100)
	VL3 DUO (BMT55-100)
	VL5 DUO (BMT55-100)

CONNECTION TURRET - BMT55



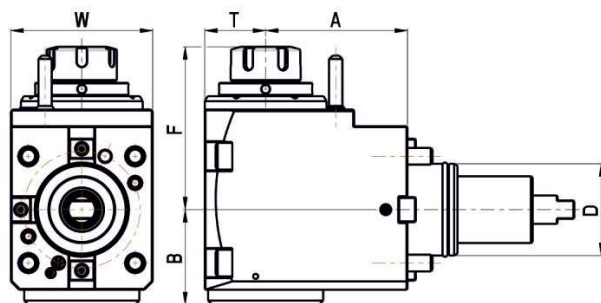
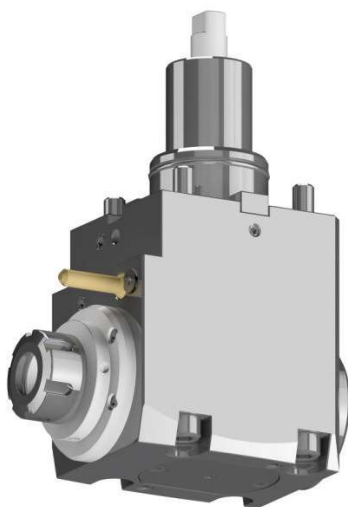
LIVE TOOLHOLDERS BMT55-100

Straight BMT drilling and milling head

 Direction of rotation: 


Code	D	Tool grip	Internal Cooling	F	W	W1	Torque [Nm]	Speed [rpm]	Ratio	P [bar]
NGT2-55/101-25/1(EM2)	55	ER25	no	70	87	85	50	6000	1:1	-
NGT2-55/101-25/2(EM2)	55	ER25	yes	70	87	85	50	6000	1:1	20
NGT2-55/101-32/1(EM2)	55	ER32	no	73	87	85	50	6000	1:1	-
NGT2-55/101-32/2(EM2)	55	ER32	yes	73	87	85	50	6000	1:1	20

Angular BMT drilling and milling head

 Direction of rotation: 


Code	D	Tool grip	Internal Cooling	Direction	A	B	F	T	W	Torque [Nm]	Speed [rpm]	Ratio	P [bar]
NGT2-55/201-25/1.3-85(EM2)	55	ER25	no	right/left	85	57	98	36,5	85	50	6000	1:1	-
NGT2-55/201-25/2.3-85(EM2)	55	ER25	yes	right/left	85	57	98	36,5	85	50	6000	1:1	20
NGT2-55/201-25/3.3-85(EM2)	55	ER25	yes	right/left	85	68	98	36,5	85	50	6000	1:1	80
NGT2-55/201-32/1.3-85(EM2)	55	ER32	no	right/left	85	57	101	36,5	85	50	6000	1:1	-
NGT2-55/201-32/2.3-85(EM2)	55	ER32	yes	right/left	85	57	101	36,5	85	50	6000	1:1	20
NGT2-55/201-32/3.3-85(EM2)	55	ER32	yes	right/left	85	68	101	36,5	85	50	6000	1:1	80